



AiP74HC/HCT148

8-to-3 Line Priority Encoder

Product Specification

Specification Revision History:

Version	Date	Description
2012-06-A1	2012-06	New
2023-03-B1	2023-03	Update template



Contents

1、General Description.....	3
2、Block Diagram And Pin Description	5
2.1、Block Diagram	5
2.2、Pin Configurations.....	6
2.3、Pin Description.....	6
2.4、Function Table.....	7
3、Electrical Parameter	7
3.1、Absolute Maximum Ratings.....	7
3.2、Recommended Operating Conditions	8
3.3、Electrical Characteristics.....	8
3.3.1、DC Characteristics 1	8
3.3.2、DC Characteristics 2.....	9
3.3.3、AC Characteristics 1.....	10
3.3.4、AC Characteristics 2.....	10
4、Testing Circuit	11
4.1、AC Testing Circuit	11
4.2、AC Testing Waveforms.....	11
4.3、Measurement Points	12
4.4、Test Data	12
5、Package Information.....	13
5.1、DIP16	13
5.2、SOP16	14
5.3、TSSOP16.....	15
6、Statements And Notes	16
6.1、The name and content of Hazardous substances or Elements in the product.....	16
6.2、Notes	16



1、General Description

The AiP74HC/HCT148 encodes eight data lines to three-line (4-2-1) binary (octal). Cascading circuitry (enable input EI and enable output EO) is provided to allow octal expansion without the need for external circuitry. The data inputs and outputs are active at the low logic level.

Features:

- Input levels:
For AiP74HC148: CMOS level
For AiP74HCT148: TTL level
- Specified from -40℃ to +125℃
- Packaging information: DIP16/SOP16/TSSOP16

Ordering Information:

Tube packing specifications:

Part number	Packaging form	Marking code	Tube quantity	Boxed tube quantity	Boxed quantity	Notes
AiP74HC148DA16.TB	DIP16	74HC148	25 PCS/tube	40 tube/box	1000 PCS/box	Dimensions of plastic enclosure: 19.0mm×6.4mm Pin spacing: 2.54mm
AiP74HCT148DA16.TB	DIP16	74HCT148	25 PCS/tube	40 tube/box	1000 PCS/box	Dimensions of plastic enclosure: 19.0mm×6.4mm Pin spacing: 2.54mm
AiP74HC148SA16.TB	SOP16	74HC148	50 PCS/tube	200 tube/box	10000 PCS/box	Dimensions of plastic enclosure: 10.0mm×3.9mm Pin spacing: 1.27mm
AiP74HCT148SA16.TB	SOP16	74HCT148	50 PCS/tube	200 tube/box	10000 PCS/box	Dimensions of plastic enclosure: 10.0mm×3.9mm Pin spacing: 1.27mm
AiP74HC148TA16.TB	TSSOP16	74HC148	96 PCS/tube	200 tube/box	19200 PCS/box	Dimensions of plastic enclosure: 5.0mm×4.4mm Pin spacing: 0.65mm
AiP74HCT148TA16.TB	TSSOP16	74HCT148	96 PCS/tube	200 tube/box	19200 PCS/box	Dimensions of plastic enclosure: 5.0mm×4.4mm Pin spacing: 0.65mm

**Reel packing specifications:**

Part number	Packaging form	Marking code	Reel quantity	Boxed reel quantity	Notes
AiP74HC148SA16.TR	SOP16	74HC148	4000 PCS/reel	8000 PCS/box	Dimensions of plastic enclosure: 10.0mm×3.9mm Pin spacing:1.27mm
AiP74HCT148SA16.TR	SOP16	74HCT148	4000 PCS/reel	8000 PCS/box	Dimensions of plastic enclosure: 10.0mm×3.9mm Pin spacing:1.27mm
AiP74HC148TA16.TR	TSSOP16	74HC148	5000 PCS/reel	10000 PCS/box	Dimensions of plastic enclosure: 5.0mm×4.4mm Pin spacing:0.65mm
AiP74HCT148TA16.TR	TSSOP16	74HCT148	5000 PCS/reel	10000 PCS/box	Dimensions of plastic enclosure: 5.0mm×4.4mm Pin spacing:0.65mm

Note: If the physical information is inconsistent with the ordering information, please refer to the actual product.



2、Block Diagram And Pin Description

2.1、Block Diagram


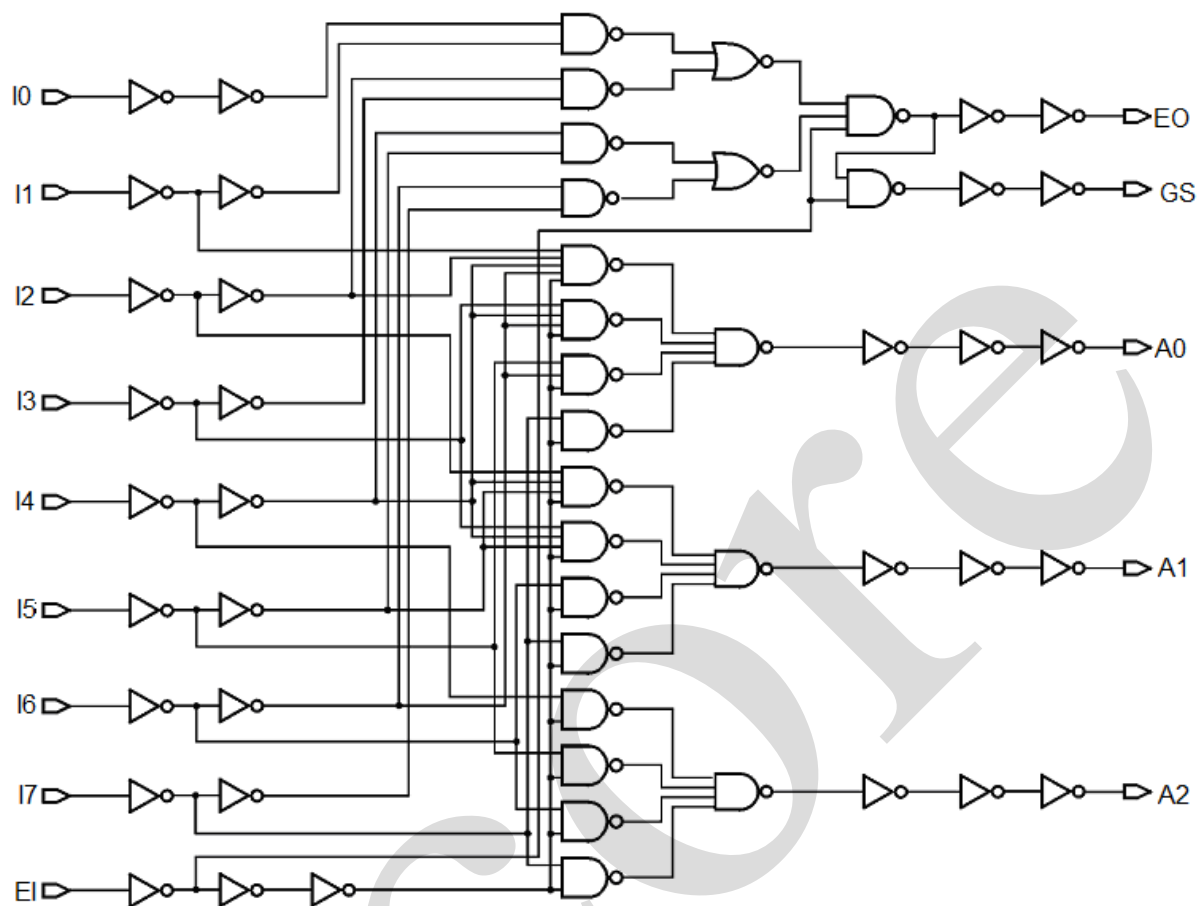


Figure 1. Functional diagram



2.2、Pin Configurations

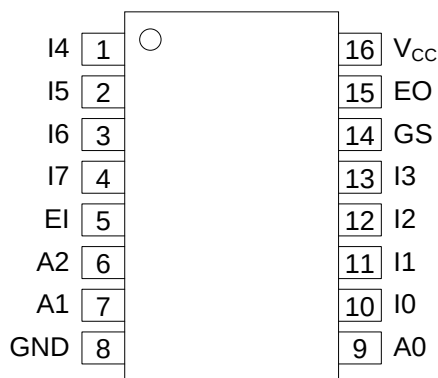

2.3、Pin Description

Pin No.	Pin Name	Description
1	I4	data input
2	I5	data input
3	I6	data input
4	I7	data input
5	EI	enable input
6	A2	data output
7	A1	data output
8	GND	ground (0V)
9	A0	data output
10	I0	data input
11	I1	data input
12	I2	data input
13	I3	data input
14	GS	data output
15	EO	enable output
16	V _{CC}	supply voltage



2.4、Function Table

Input									Output				
EI	I0	I1	I2	I3	I4	I5	I6	I7	A2	A1	A0	GS	EO
H	X	X	X	X	X	X	X	X	H	H	H	H	H
L	H	H	H	H	H	H	H	H	H	H	H	H	L
L	X	X	X	X	X	X	X	L	L	L	L	L	H
L	X	X	X	X	X	X	L	H	L	L	H	L	H
L	X	X	X	X	X	L	H	H	L	H	L	L	H
L	X	X	X	X	L	H	H	H	L	H	H	L	H
L	X	X	X	L	H	H	H	H	H	L	L	L	H
L	X	X	L	H	H	H	H	H	H	L	H	L	H
L	X	L	H	H	H	H	H	H	H	H	L	L	H
L	L	H	H	H	H	H	H	H	H	H	H	L	H

Note: H=HIGH voltage level; L=LOW voltage level; X = don't care.

3、Electrical Parameter

3.1、Absolute Maximum Ratings

(Voltages are referenced to GND (ground=0V), unless otherwise specified.)

Parameter	Symbol	Conditions	Min.	Max.	Unit
supply voltage	V_{CC}	-	-0.5	+7.0	V
input clamping current	I_{IK}	$V_I < -0.5V$ or $V_I > V_{CC}+0.5V$	-	± 20	mA
output clamping current	I_{OK}	$V_O < -0.5V$ or $V_O > V_{CC}+0.5V$	-	± 20	mA
output current	I_O	$-0.5V < V_O < V_{CC}+0.5V$	-	± 25	mA
supply current	I_{CC}	-	-	+50	mA
ground current	I_{GND}	-	-50	-	mA
storage temperature	T_{stg}	-	-65	+150	°C
soldering temperature	T_L	10s	DIP	245	°C
			SOP/TSSOP	260	

**3.2、Recommended Operating Conditions**

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
AiP74HC148						
supply voltage	V_{CC}	-	2.0	5.0	6.0	V
input voltage	V_I	-	0	-	V_{CC}	V
output voltage	V_O	-	0	-	V_{CC}	V
ambient temperature	T_{amb}	-	-40	-	+125	°C
AiP74HCT148						
supply voltage	V_{CC}	-	4.5	5.0	5.5	V
input voltage	V_I	-	0	-	V_{CC}	V
output voltage	V_O	-	0	-	V_{CC}	V
ambient temperature	T_{amb}	-	-40	-	+125	°C

3.3、Electrical Characteristics**3.3.1、DC Characteristics 1**

($T_{amb}=-40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$, voltages are referenced to GND (ground=0V), unless otherwise specified.)

Parameter	Symbol	Conditions		Min.	Typ.	Max.	Unit
AiP74HC148							
HIGH-level input voltage	V _{IH}	V _{CC} =2.0V		1.5	1.2	-	V
		V _{CC} =4.5V		3.15	2.4	-	V
		V _{CC} =6.0V		4.2	3.2	-	V
LOW-level input voltage	V _{IL}	V _{CC} =2.0V		-	0.8	0.5	V
		V _{CC} =4.5V		-	2.1	1.35	V
		V _{CC} =6.0V		-	2.8	1.8	V
HIGH-level output voltage	V _{OH}	V _I =V _{IH} or V _{IL}	I _O =-20uA; V _{CC} =2.0V	1.9	2.0	-	V
			I _O =-20uA; V _{CC} =4.5V	4.4	4.5	-	V
			I _O =-20uA; V _{CC} =6.0V	5.9	6.0	-	V
			I _O =-4.0mA; V _{CC} =4.5V	3.84	4.32	-	V
			I _O =-5.2mA; V _{CC} =6.0V	5.34	5.81	-	V
LOW-level output voltage	V _{OL}	V _I =V _{IH} or V _{IL}	I _O =20uA; V _{CC} =2.0V	-	0	0.1	V
			I _O =20uA; V _{CC} =4.5V	-	0	0.1	V
			I _O =20uA; V _{CC} =6.0V	-	0	0.1	V
			I _O =4.0mA; V _{CC} =4.5V	-	0.15	0.33	V
			I _O =5.2mA; V _{CC} =6.0V	-	0.16	0.33	V
input leakage current	I _I	V _I =V _{CC} or GND; V _{CC} =6.0V		-	-	±2	uA
supply current	I _{CC}	V _I =V _{CC} or GND; I _O =0A; V _{CC} =6.0V		-	-	2	uA
AiP74HCT148							
HIGH-level input voltage	V _{IH}	V _{CC} =4.5V to 5.5V		2.0	1.6	-	V
LOW-level input voltage	V _{IL}	V _{CC} =4.5V to 5.5V		-	1.2	0.8	V
HIGH-level output voltage	V _{OH}	V _I =V _{IH} or V _{IL} ; V _{CC} =4.5V	I _O =-20uA	4.4	4.5	-	V
			I _O =-4.0mA	3.84	4.32	-	V
LOW-level	V _{OL}	V _I =V _{IH} or V _{IL} ;	I _O =20uA	-	0	0.1	V



output voltage		$V_{CC}=4.5V$	$I_O=4.0mA$	-	0.15	0.33	V
input leakage current	I_I	$V_I=V_{CC}$ or GND; $V_{CC}=5.5V$		-	-	± 2	μA
supply current	I_{CC}	$V_I=V_{CC}$ or GND; $I_O=0A$; $V_{CC}=5.5V$		-	-	2	μA
additional supply current	ΔI_{CC}	$V_I=V_{CC}-2.1V$; other inputs at V_{CC} or GND; $I_O=0A$; $V_{CC}=4.5V$ to $5.5V$		-	-	135	μA

3.3.2、DC Characteristics 2

($T_{amb}=-40^{\circ}C$ to $+125^{\circ}C$, voltages are referenced to GND (ground=0V), unless otherwise specified.)

Parameter	Symbol	Conditions		Min.	Typ.	Max.	Unit
AiP74HC148							
HIGH-level input voltage	V _{IH}	V _{CC} =2.0V		1.5	-	-	V
		V _{CC} =4.5V		3.15	-	-	V
		V _{CC} =6.0V		4.2	-	-	V
LOW-level input voltage	V _{IL}	V _{CC} =2.0V		-	-	0.5	V
		V _{CC} =4.5V		-	-	1.35	V
		V _{CC} =6.0V		-	-	1.8	V
HIGH-level output voltage	V _{OH}	V _I =V _{IH} or V _{IL}	I _O =-20uA; V _{CC} =2.0V	1.9	-	-	V
			I _O =-20uA; V _{CC} =4.5V	4.4	-	-	V
			I _O =-20uA; V _{CC} =6.0V	5.9	-	-	V
			I _O =-4.0mA; V _{CC} =4.5V	3.7	-	-	V
			I _O =-5.2mA; V _{CC} =6.0V	5.2	-	-	V
LOW-level output voltage	V _{OL}	V _I =V _{IH} or V _{IL}	I _O =20uA; V _{CC} =2.0V	-	-	0.1	V
			I _O =20uA; V _{CC} =4.5V	-	-	0.1	V
			I _O =20uA; V _{CC} =6.0V	-	-	0.1	V
			I _O =4.0mA; V _{CC} =4.5V	-	-	0.4	V
			I _O =5.2mA; V _{CC} =6.0V	-	-	0.4	V
input leakage current	I _I	V _I =V _{CC} or GND; V _{CC} =6.0V		-	-	±4	uA
supply current	I _{CC}	V _I =V _{CC} or GND; I _O =0A; V _{CC} =6.0V		-	-	4	uA
AiP74HCT148							
HIGH-level input voltage	V _{IH}	V _{CC} =4.5V to 5.5V		2.0	-	-	V
LOW-level input voltage	V _{IL}	V _{CC} =4.5V to 5.5V		-	-	0.8	V
HIGH-level output voltage	V _{OH}	V _I =V _{IH} or V _{IL} ; V _{CC} =4.5V	I _O =-20uA	4.4	-	-	V
			I _O =-4.0mA	3.7	-	-	V
LOW-level output voltage	V _{OL}	V _I =V _{IH} or V _{IL} ; V _{CC} =4.5V	I _O =20uA	-	-	0.1	V
			I _O =4.0mA	-	-	0.4	V
input leakage current	I _I	V _I =V _{CC} or GND; V _{CC} =5.5V		-	-	±4	uA
supply current	I _{CC}	V _I =V _{CC} or GND; I _O =0A; V _{CC} =5.5V		-	-	4	uA
additional supply current	ΔI _{CC}	V _I =V _{CC} -2.1V; other inputs at V _{CC} or GND; I _O =0A; V _{CC} =4.5V to 5.5V		-	-	147	uA



3.3.3、AC Characteristics 1

($T_{amb} = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$, voltages are referenced to GND (ground=0V), unless otherwise specified.)

Parameter	Symbol	V _{CC}	Conditions	Min.	Typ.	Max.	Unit	
AiP74HC148								
propagation delay	t _{PLH} , t _{PHL}	2.0V	C _L =50pF	see Figure 3	-	50	160	ns
		4.5V	C _L =50pF		-	18	32	ns
		5.0V	C _L =15pF		-	15	-	ns
		6.0V	C _L =50pF		-	14	27	ns
transition time	t _{THL} , t _{TLH}	2.0V	C _L =50pF	see Figure 3	-	19	75	ns
		4.5V	C _L =50pF		-	7	15	ns
		6.0V	C _L =50pF		-	6	6	ns
AiP74HCT148								
propagation delay	t _{PLH} , t _{PHL}	4.5V	C _L =50pF	see Figure 3	-	19	75	ns
		5.0V	C _L =15pF		-	7	15	ns
transition time	t _{THL} , t _{TLH}	4.5V	C _L =50pF	see Figure 3	-	6	6	ns

3.3.4、AC Characteristics 2

($T_{amb} = -40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$, voltages are referenced to GND (ground=0V), unless otherwise specified.)

Parameter	Symbol	V _{CC}	Conditions		Min.	Typ.	Max.	Unit
AiP74HC148								
propagation delay	t _{PLH} , t _{PHL}	2.0V	C _L =50pF	see Figure 3	-	-	200	ns
		4.5V	C _L =50pF		-	-	40	ns
		6.0V	C _L =50pF		-	-	34	ns
transition time	t _{THL} , t _{TLH}	2.0V	C _L =50pF	see Figure 3	-	-	95	ns
		4.5V	C _L =50pF		-	-	19	ns
		6.0V	C _L =50pF		-	-	16	ns
AiP74HCT148								
propagation delay	t _{PLH} , t _{PHL}	4.5V	C _L =50pF	see Figure 3	-	-	44	ns
transition time	t _{THL} , t _{TLH}	4.5V	C _L =50pF	see Figure 3	-	-	19	ns



4、Testing Circuit

4.1、AC Testing Circuit

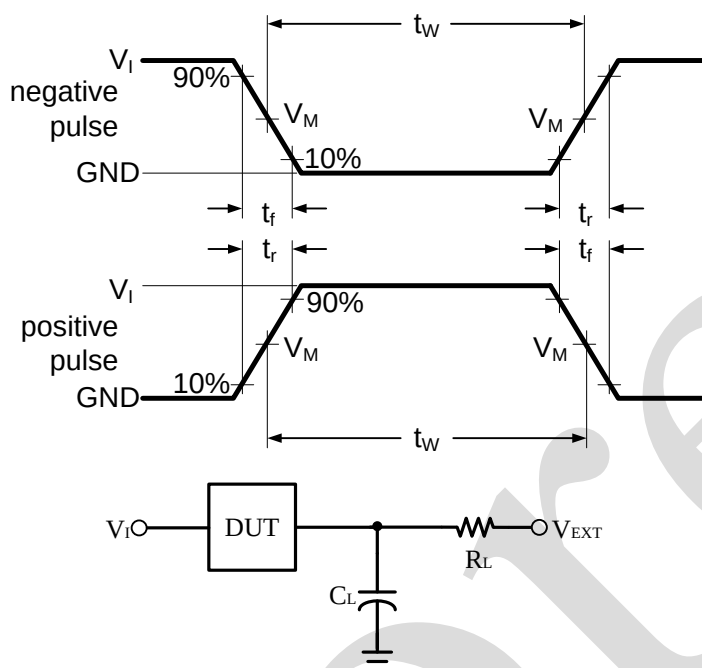


Figure 2. Test circuit for measuring switching times

C_L includes probe and jig capacitance.

4.2、AC Testing Waveforms

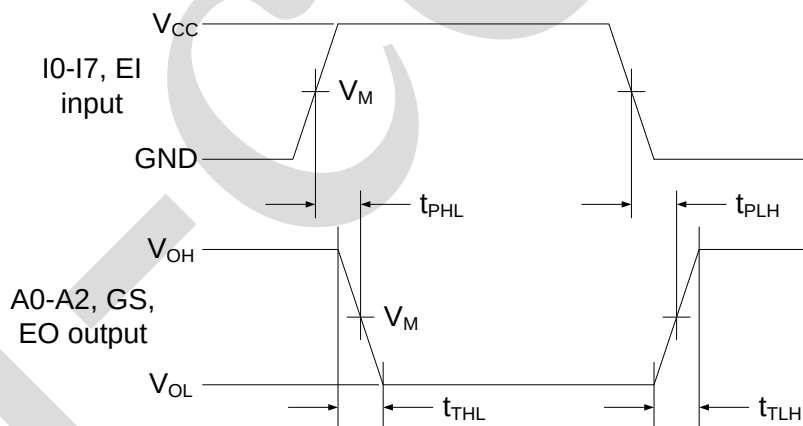


Figure 3. Input to output propagation delays and output transition times



4.3、Measurement Points

Type	Input	Output
	V_M	V_M
AiP74HC148	$0.5 \times V_{CC}$	$0.5 \times V_{CC}$
AiP74HCT148	1.3V	1.3V


4.4、Test Data

Type	Input		Load		S1 position
	V_I	t_r, t_f	C_L	R_L	t_{PLH}, t_{PHL}
AiP74HC148	V_{CC}	3.0ns	15pF, 50pF	1k Ω	open
AiP74HCT148	3V	3.0ns	15pF, 50pF	1k Ω	open



5、Package Information




5.1、DIP16

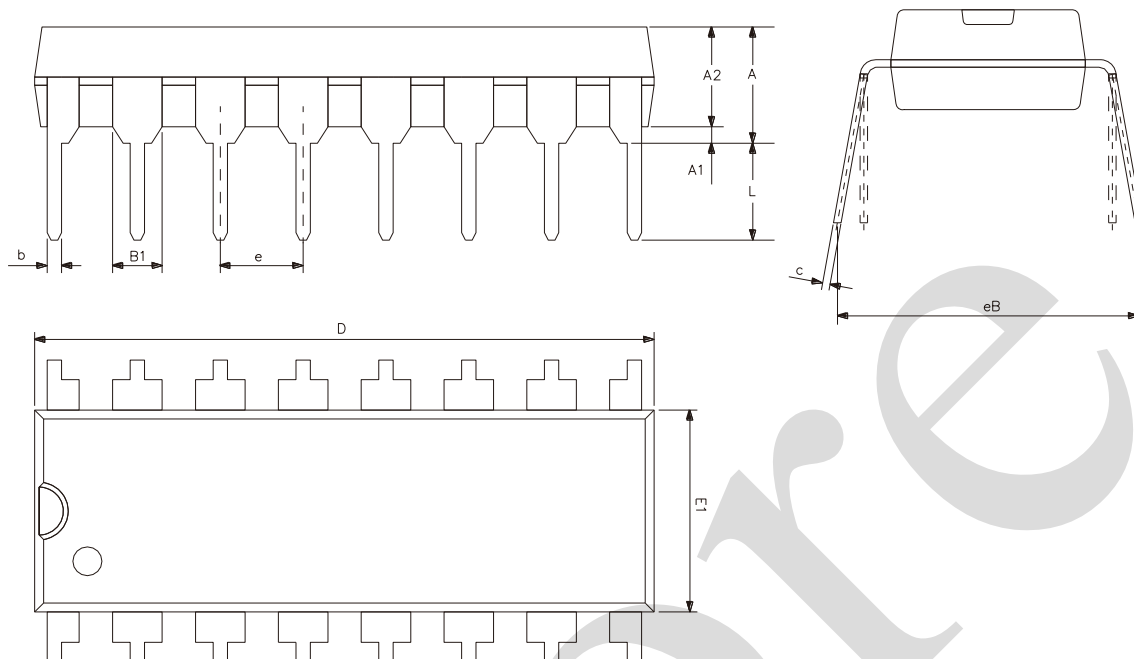

Symbol	Dimensions (mm)	
	Min.	Max.
A2	3.20	3.60
A1	0.51	—
A	3.60	5.33
L	3.00	—
b	0.36	0.56
B1	1.52	
D	18.80	19.94
E1	6.20	6.60
e	2.54	
c	0.20	0.36
eB	7.62	9.30






5.2、SOP16

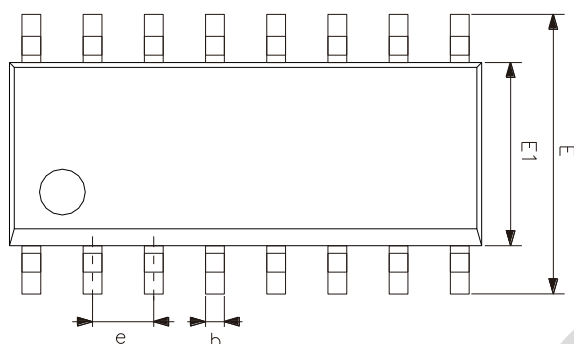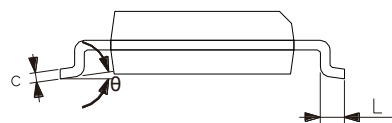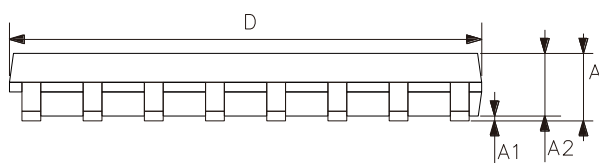

Symbol	Dimensions (mm)	
	Min.	Max.
A	1.35	1.80
A1	0.10	0.25
A2	1.25	1.55
b	0.33	0.51
c	0.19	0.25
D	9.50	10.10
E	5.80	6.30
E1	3.70	4.10
e	1.27	
L	0.35	0.89
θ	0°	8°



5.3、TSSOP16

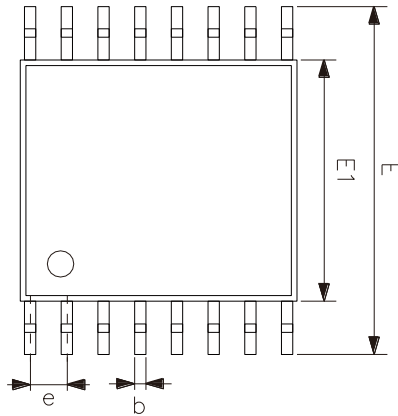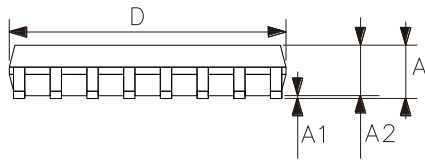

Symbol	Dimensions (mm)	
	Min.	Max.
A	-	1.20
A1	0.05	0.15
A2	0.80	1.05
b	0.19	0.30
c	0.09	0.20
D	4.90	5.10
E1	4.30	4.50
E	6.20	6.60
e	0.65	
L	0.45	0.75
θ	0°	8°



6、Statements And Notes

6.1、The name and content of Hazardous substances or Elements in the product

Part name	Hazardous substances or Elements									
	Lead and lead compounds	Mercury and mercury compounds	Cadmium and cadmium compounds	Hexavalent chromium compounds	Polybrominated biphenyls	Polybrominated biphenyl ethers	Dibutyl phthalate	Butylbenzyl phthalate	Di-2-ethylhexyl phthalate	Diisobutyl phthalate
Lead frame	○	○	○	○	○	○	○	○	○	○
Plastic resin	○	○	○	○	○	○	○	○	○	○
Chip	○	○	○	○	○	○	○	○	○	○
The lead	○	○	○	○	○	○	○	○	○	○
Plastic sheet installed	○	○	○	○	○	○	○	○	○	○
explanation	○: Indicates that the content of hazardous substances or elements in the detection limit of the following the SJ/T11363-2006 standard. ×: Indicates that the content of hazardous substances or elements exceeding the SJ/T11363-2006 Standard limit requirements.									

6.2、Notes

We Recommend you to read this chapter carefully before using this product.

The information in this chapter is provided for reference only and i-Core disclaims any express or implied warranties, including but not limited to applicability, special application or non-infringement of third party rights.

This product is not suitable for critical equipment such as life-saving, life-sustaining or safety equipment. It is also not suitable for applications that may result in personal injury, death, or serious property or environmental damage due to product malfunction or failure. I-Core will not be liable for any damages incurred by the customers at their own risk for such applications.

The customer is responsible for conducting all necessary tests i-Core's application to avoid failure in the application or the application of the customer's third party users. I-Core does not accept any liability.

The Company reserves the right to change or improve the information published in this chapter at any time. The information in this chapter are subject to change without notice. We recommend the customer to consult our sales staff before purchasing.

Please obtain related materials form i-Core's regular channels and we are not responsible for its content if it is provided by sources other than our company.

In case of any conflict between the Chinese and English version, the version is subject to the Chinese one.